


Technical Specification 2000











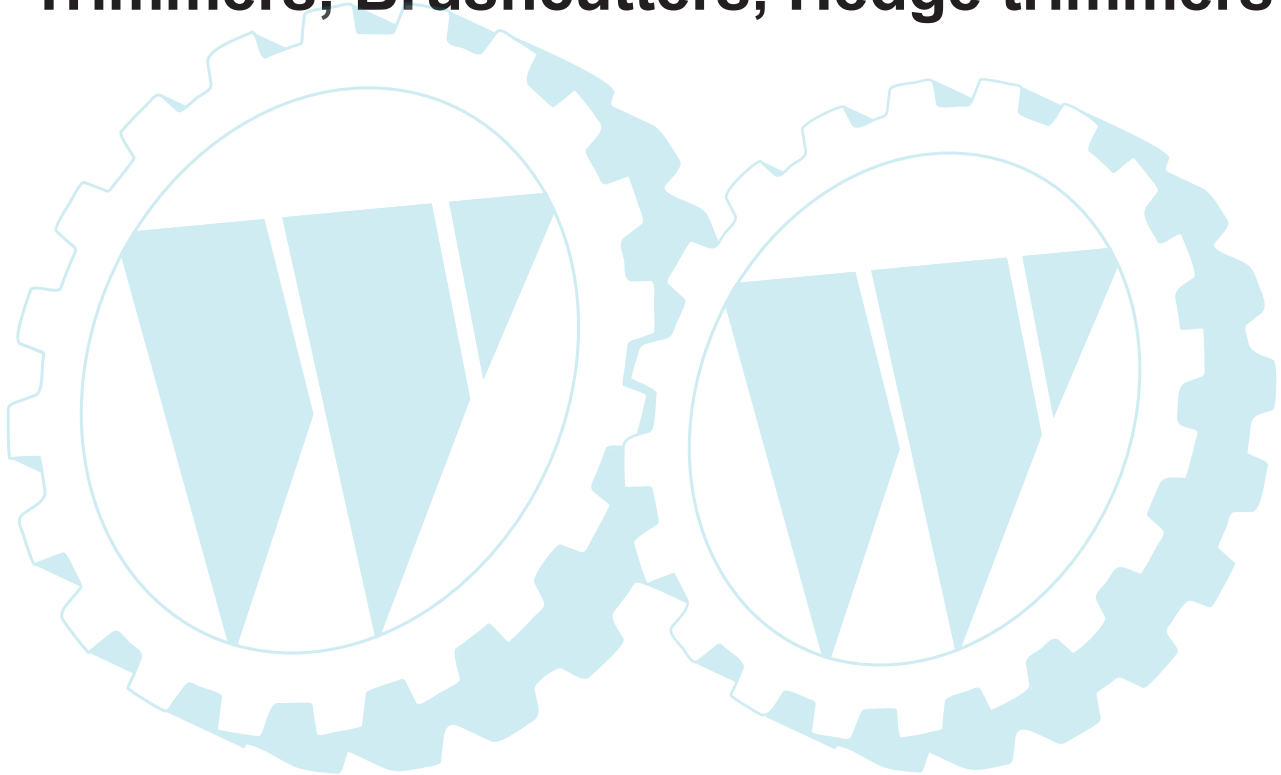








Trimmers, Brushcutters, Hedge trimmers



TECHNICAL SPECIFICATION 2000

Jonsered Trimmers, Brushcutters, Hedge trimmers



																				
	cc/cui	mm	mm	kW/HP rpm	rpm	rpm	** rpm		mm/in		mm/in	type	set *	liter/US fl oz	mm/in	mm/in	M3/h, cuft/h	m/s mph	kg/lb	
GT 21 L	21,2/1,29	32,0	26,4	0,4/0,5 7 200	3 700	—	7 500	Phelon CD	0,3/0,012	Champion RCJ 8Y	0,5/0,02	Walbro WT 218	L=1 *	0,45/15,2	1:1	5/16" x24(R)	—	—	—	3,6/7,9
GT 25L	24,0/1,46	34,5	26,4	0,5/0,7 7 600	3 000	4 000	9 000	Phelon CD	0,3/0,012	Champion RCJ 8Y	0,5/0,02	Walbro WT 380	H=1 * L=1	0,45/15,2	1:1	3/8" x24(R)	—	—	—	4,5/9,9
GT 26L/D	24,0/1,46	34,5	26,4	0,5/0,7 7 600	3 000	4 000	9 000	Phelon CD	0,3/0,012	Champion RCJ 8Y	0,5/0,02	Walbro WT 380	H=1 * L=1	0,45/15,2	1:1,23	3/8" x24(L)	—	—	—	5,2/11,5 5,5/12,2
GT 2026L/CL	25,4/1,55	34,0	28,0	0,9/1,2 9 000	2 700	3 700	11 000 - 12 000	Walbro CD	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro WT 548	H=1-1 1/4* L=1-1 1/4	0,50/16,9	1:1,40	M10x1,25	—	—	—	L:5,7/12,6 CL:6,0/13,2
GR 2032L	30,8/1,88	35,0	32,0	1,1/1,5 8 400	2 700	3 800	11 000 - 12 000	Walbro CD	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro WT 548	H=1-1 1/4* L=1-1 1/4	0,50/16,9	1:1,40	M10x1,25	—	—	—	6,2/13,7
GR 2026D	25,4/1,55	34,0	28,0	0,9/1,2 9 000	2 700	3 700	11 000 - 12 000	Walbro CD	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro WT 548	H=1-1 1/4* L=1-1 1/4	0,50/16,9	1:1,40	M10x1,25	—	—	—	6,0/13,2
GR 2032D	30,8/1,88	35,0	32,0	1,1/1,5 8 400	2 700	3 800	11 000 - 12 000	Walbro CD	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro WT 548	H=1-1 1/4* L=1-1 1/4	0,50/16,9	1:1,40	M10x1,25	—	—	—	6,5/14,3
GR 2036	36,3/2,20	38,0	32,0	1,3/1,7 9 000	2 700	3 800	11 000 - 12 000	Walbro CD	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro WT 548	H=1-1 1/4* L=1-1 1/4	0,50/16,9	1:1,40	M10x1,25	—	—	—	7,3/16,1
GR 41	40,2/2,50	40,0	32,0	1,8/2,4 9 000	2 700	3 700	12 500	Electrolux ET	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro WT 99	H=1-1 1/4 L=1-1 1/4	0,60/20,3	1:1,36	M12x1,75	—	—	—	8,6/18,9
GR 50	48,7/2,97	44,0	32,0	2,1/2,8 9 000	2 700	3 700	12 500	Electrolux ET	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro WT 99	H=1-1 1/4 L=1-1 1/4	0,60/20,3	1:1,36	M12x1,75	—	—	—	8,6/18,9
RS 44	44,3/2,70	42,0	32,0	2,0/2,7 9 000	2 700	3 700	12 500	Electrolux ET	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro WT 99	H=1-1 1/4 L=1-1 1/4	0,60/20,3	1:1,36	M12x1,75	—	—	—	8,4/18,5
RS 52	50,8/3,1	45,0	32,0	2,4/3,2 9 600	2 700	4 300	13 500	Electrolux ET	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro HDA 142	H=1-1 1/4 L=1-1 1/4	0,75/25,3	1:1,36	M12x1,75	—	—	—	9,3/20,5
BP 2040C	36,3/2,20	38,0	32,0	1,3/1,7 9 000	2 700	3 800	11 000 - 12 000	Walbro CD	0,3/0,012	Champion RCJ 7Y	0,5/0,02	Walbro WT 270	H=1-1 1/4* L=1-1 1/4	0,50/16,9	1:1,40	M10x1,25	—	—	—	9,0/19,8
HT 21	18,0/1,1	29,5	26,4	0,3/0,4 7 000	3 000	4 600	10 000	Phelon Solid State	0,3/0,012	Champion RCJ 8Y	0,5/0,02	Walbro WT 406 Zama C1U-W4	H=1 L=1	0,21/6,80	1:5,70	—	480/18,9	—	—	4,4/9,7
HT 2122 Pro Twist	21,2/1,29	31,0	28,0	0,74/1,0 8 000	3 000	4 000	10 000	Ikeda ET	0,3/0,012	NGK BPMR6A	0,5/0,02	Walbro WYL	Fixed	0,35/11,8	1:5,30	—	550/21,6	—	—	4,2/9,2
HT 2126 Pro Twist	23,9/1,46	33,0	28,0	1,0/1,36 8 000	3 000	3 800	10 000	OPPAMA CD	0,3/0,012	NGK BPMR6A	0,6/0,024	Walbro WYL	Fixed	0,35/11,8	1:5,30	—	650/25,6	—	—	4,7/10,3
HT 2130	23,9/1,46	33,0	28,0	1,0/1,36 8 000	3 000	3 800	10 000	OPPAMA CD	0,3/0,012	NGK BPMR6A	0,6/0,024	Walbro WYL	Fixed	0,35/11,8	1:5,30	—	760/29,9	—	—	5,1/11,2
BV 32	31,7/1,92	36,9	30,2	0,65/0,9 6 000	4 000	—	7 600	Phelon CD	0,3/0,012	Champion RCJ 8Y	0,5/0,02	Walbro WT 141	L=1 *	0,60/20,3	—	—	—	10,2/360	75/167	5,7/12,5

108 20 14-01

Do not exceed the max no load free speed or engine damage may occur. This figure is for a broken in unit. Reduce RPM by 600-700 rpm for a new product.

* Basic setting. Only applies to needles without caps fitted

** Regulated ignition system